

DIGITUS mini GBIC (SFP) Module, 1.25 Gbps, 0.55km

DN-81000
EAN 4016032305651



1.25 Gbps SFP Module, Multimode LC Duplex Connector, 850nm, Up to 550m

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

The plug and play fiber connection

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Ubiquiti, Allied Telesis, Allnet, CISCO, D-Link, Edimax, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, ZyXEL, ZTE, Avaya, Mikrotik, ENTERASYS, FINISAR, FORCE 10, RIVERSTONE, Fortinet
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant



- Hot pluggable
- Connector: 1x LC Duplex
- 1000Base-SX - For Short Haul
- Wavelength: 850nm
- Transmission power: minimum -8 dBm, maximum -3 dBm
- Sensitivity Receiving Power: Minimum -20 dBm
- For a Distance of up to 0.55km
- Suitable for 50/125µm and 62.5/125µm multimode fiber cables
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Cisco
- Connector: LC
- DDM Support: no
- Distance (km): 0.5
- Mode: Multimode
- Ethernet speed: Gigabit
- Wavelength: 850 nm

Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79,025.00
Packaging Unit Inside	30	1.06	7.00	20.00	30.00	4,200.00
Packaging Unit Single	1	0.04	3.10	11.80	9.30	340.19
Net single without Packaging	1	0.02	1.00	5.90	0.80	0.00

More images:

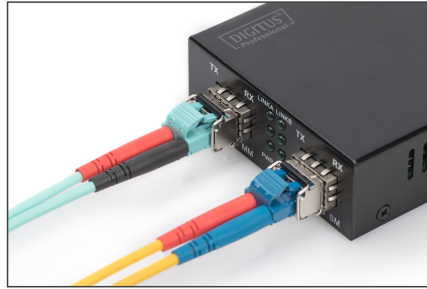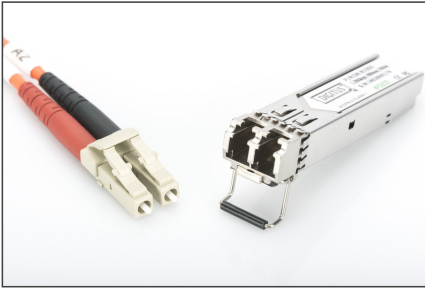

Part Number	Data Rate	Speed	Distance	Connector	Wavelength	Operating Temperature	Industrial Model
Di-4140	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 75 °C	✓
Di-4141	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 75 °C	✓
Di-4142	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 75 °C	✓
Di-4143	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 75 °C	✓
Di-4144	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4145	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4146	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4147	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4148	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4149	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4150	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4151	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4152	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4153	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4154	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4155	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4156	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4157	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4158	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4159	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4160	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4161	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4162	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4163	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4164	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4165	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4166	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4167	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4168	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4169	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4170	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4171	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4172	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4173	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4174	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4175	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4176	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4177	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4178	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4179	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4180	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4181	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4182	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4183	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4184	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4185	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4186	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4187	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4188	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4189	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4190	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4191	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4192	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4193	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4194	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4195	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4196	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4197	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4198	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓
Di-4199	10 Gbps	10 Gbps	300m	LC Duplex OM3	1550nm	-40 to 85 °C	✓
Di-4200	10 Gbps	10 Gbps	300m	LC Duplex OM3	1310nm	-40 to 85 °C	✓

